


**PLAN**

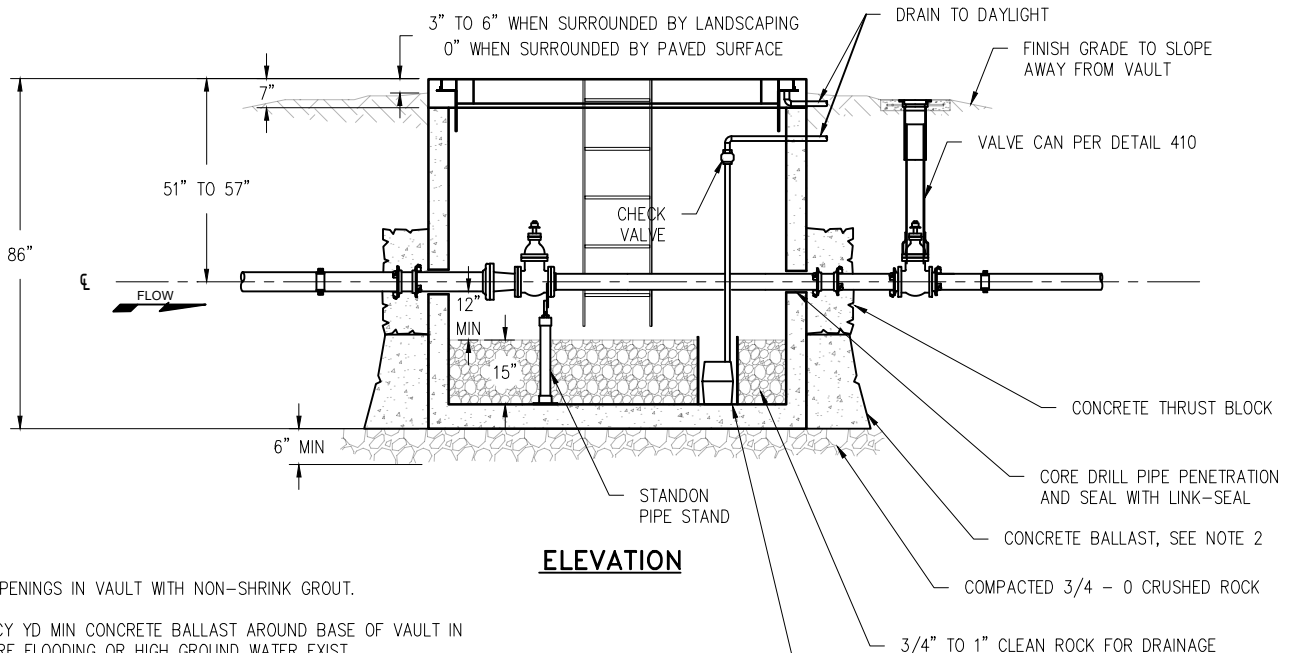

**ELEVATION**

**NOTES:**

1. SEAL ALL OPENINGS IN VAULT WITH NON-SHRINK GROUT.
2. INSTALL 3 CY YD MIN CONCRETE BALLAST AROUND BASE OF VAULT IN AREAS WHERE FLOODING OR HIGH GROUND WATER EXIST.
3. ALL MATERIALS SHALL BE AS NAMED OR EQUAL. SUBMIT ALTERNATES FOR APPROVAL.
4. ORS 92.044(7) PROHIBITS LOCATING ANY UTILITY INFRASTRUCTURE WITHIN 12 INCHES OF A SURVEY MONUMENT. DEVELOPER SHALL PAY FOR ANY RELOCATION OF SERVICES AND/OR METER BOXES FOUND TO FALL WITHIN 12 INCHES OF A SURVEY MONUMENT LOCATION.

NO.	REVISIONS	DATE	BY
1			
2			
3			
4			